



MITSUBISHI ELECTRIC

MULTIMEDIA DATA/VIDEO PROJECTORS

Changes for the Better




Impressive Visual Presentation Even in Small Meeting Rooms

3 Key Features Ensure Effective Visual Communications

Functional Performance at Its Best → Ultra-short Throw Projection

Using a projector in small meetings rooms used to be difficult due to insufficient projection distance. Not any more! The XD250U-ST requires a mere 83cm for a projection of a clear, easy-to-read screen image approximately the size of a 60-inch whiteboard. It can be set on the edge of a tabletop, eliminating the loss of workspace commonly caused by the need to clear a path for the projection light.


Projected Image comparison (with 60-inch screen)

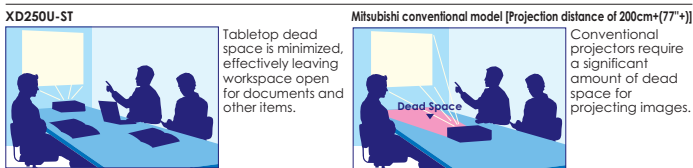

Low Operating Cost

Standby Mode under 1W*1
6,000hr*2 Long-life Lamp, filter-free

Low operating cost is realized by considering energy savings for every projector function. Maintenance has been reduced as well.




(*1): 3W in Normal mode (network turned on).
(*2): When used in the Low lamp mode. Maximum lamp life in Standard mode use is 3,000 hours.
(*3): Lamp life refers to the average time required for brightness to be reduced by half, and not the time specified in the warranty. Service life may vary widely depending on the environment and conditions, and whether or not cleaning and other maintenance procedures are followed.

Quiet Fan Noise

Silent 28dBA Operation (in low mode)


Like giving a presentation in a suburban residential area in the middle of the night! That's the operating sound level promised by the XD250U-ST.



Professional Specifications and High Cost Performance

Simultaneous Message Display → Visual PA

Using a control room computer equipped with projector-control software, simultaneously send messages (up to 350 characters long) in real-time to projectors connected to the LAN. Visual PA is ideal for broadcasting important information to multiple rooms in the school or building.

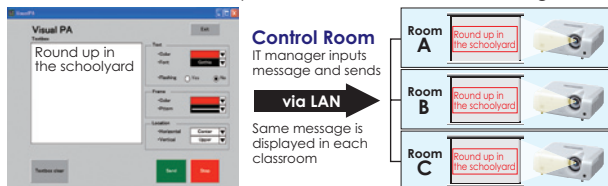

All-in-one Management of Multiple Projectors → ProjectorView Global+

After installing ProjectorView Global+ (separately available software), the status of multiple projectors connected to a dedicated LAN in the same network can be monitored. Remote operation of the power switch (ON/OFF), image input switch and other functions is also possible using the software.

Enhanced Terminal group → HDMI, Dual PC Input

Simple Lamp Replacement → Top-loading Lamp

Vastly Improved Operability → Quick Menu

Automatic Subtitle Function → Closed Caption (CC) Capable

Excellent Sound Projection → 10W Speaker + Audio Mix

A high-volume, 10W audio speaker is built-in, eliminating the need for an external speaker. By using a microphone (sold separately) the presenter's voice is reproduced loud and clear in real-time. Additionally, the "Audio Mix" feature enables the microphone's audio to combine with the sound from another input source.



NEW
Ultra-short Throw Projector
XD250U-ST

NEW




XD250U-ST

Ultra-short Throw Projector


Brilliant Color™	Color Enhancer	Wall Screen	User Logo Projection	10W Speaker	Password Lock	Instant Shutdown
Long-life Lamp	Low Standby Power	Top/Side Loading Lamp	LAN (RJ-45)	HDMI	Closed Caption	Low Fan Noise
Picture Performance		Presentation		User Friendly		

Input and Output Terminals

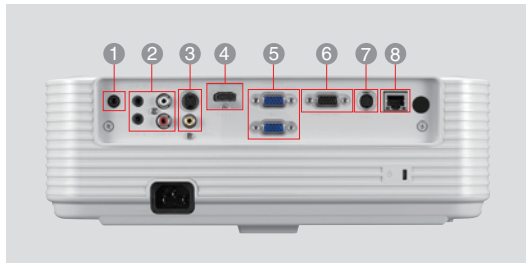

- 1 Audio output
- 2 Audio input
- 3 S-Video/Video
- 4 HDMI
- 5 PC/Component Video input
- 6 Monitor output
- 7 Serial RS-232C
- 8 LAN (RJ-45)

Dimensions

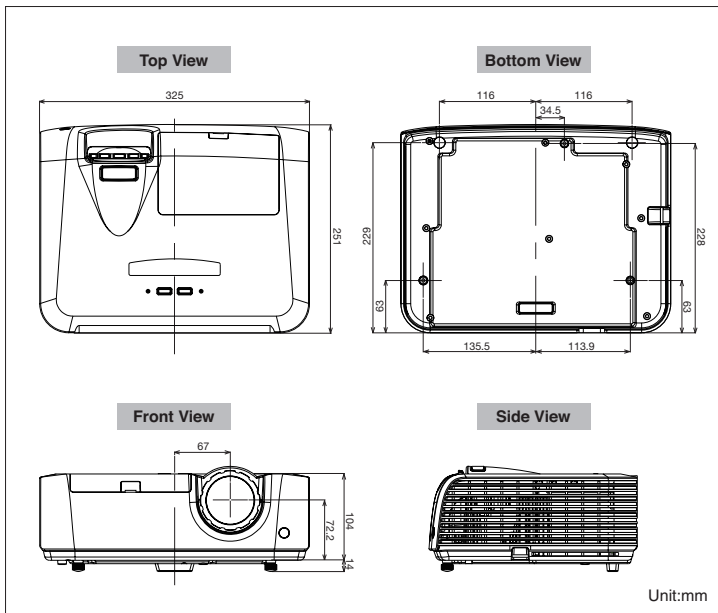


Specifications

Model	XD250U-ST
Display Technology	0.55" 1-Chip DMD
Resolution	1024 x 768 (Total 786,432 pixels)
Brightness	2600lm
Contrast Ratio	2500 : 1
Picture Size	40" - 300"
Throw Ratio	0.7
Source Lamp	190W (Shut-off Time 6000hr) with Low Mode, 230W (Shut-off Time 3000hr) with Standard Mode
PC Compatibility	640 x 480 - 1280 x 1024, True : 1024 x 768, Sync on Green available
Video Compatibility	NTSC / NTSC 4.43 / PAL (including PAL-M, N) / SECAM / PAL-60 Component Video ; 480i/p (525i/p), 576i/p (625i/p), 720p (750p), 1080i (1125i 60Hz), 1080i (1125i 50Hz)
Input Terminals	RGB ; mini D-sub 15pin x 2 Video ; RCA x 1, S-VIDEO x 1 Digital ; HDMI x 1 Audio ; Stereo mini jack (ø3.5mm) x 2, RCA jack (L/R) x 1
Output Terminals	RGB ; mini D-sub 15pin x 1 Audio ; Stereo mini jack (ø3.5mm) x 1
Communication Terminal	RS-232C ; mini DIN 8pin x 1, LAN ; RJ-45 x 1
Audio Speaker	10W Mono
Dimensions (W x H x D)	325 x 118 x 251 mm / 12.6 x 4.1 x 9.3 inch
Weight	3.4kg / 7.5lbs
Power Requirements	AC 100-240V, 50/60Hz
Optional Lamp	VLT-XD280LP

• Compliance with ISO21118-2005
• All brand names and product names are trademarks, registered trademarks or trade names of their respective holders.

Screen size and Projection distance

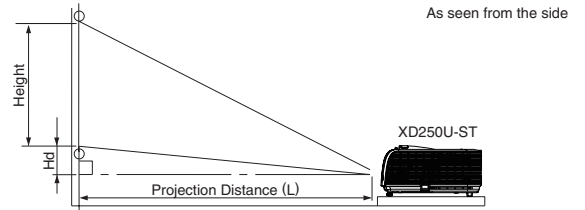

Screen size chart (4:3 aspect ratio)

Diagonal Size		Screen				Distance from screen (L)		Height projected image (Hd)	
		Width (W)		Height (H)					
inch	cm	inch	cm	inch	cm	inch	m	inch	cm
40	102	32	81	24	61	22	0.5	3.6	9
60	152	48	122	36	91	33	0.8	5.4	14
80	203	64	163	48	122	44	1.1	7.2	18
100	254	80	203	60	152	55	1.4	9.0	23
150	381	120	305	90	229	83	2.1	13.4	34
200	508	160	406	120	305	111	2.8	17.9	45
250	635	200	508	150	381	139	3.5	22.4	57
300	762	240	610	180	457	167	4.3	26.9	68

The above numbers are approximate, and may be slightly different from the actual measurements.

Screen size chart (16:9 aspect ratio)

Diagonal Size		Screen				Distance from screen (L)		Height projected image (Hd)	
		Width (W)		Height (H)					
inch	cm	inch	cm	inch	cm	inch	m	inch	cm
40	102	35	89	20	50	23	0.6	7.2	18
60	152	52	133	29	75	36	0.9	10.8	27
80	203	70	177	39	100	48	1.2	14.3	36
100	254	87	221	49	125	60	1.5	17.9	46
150	381	131	332	74	187	91	2.3	26.9	68
200	508	174	443	98	249	121	3.1	35.9	91
250	635	218	553	123	311	152	3.9	44.8	114
300	762	261	664	147	374	182	4.6	53.8	137

The above numbers are approximate, and may be slightly different from the actual measurements.

MITSUBISHI ELECTRIC CORPORATION
HEAD OFFICE : TOKYO BLDG., 2-7-3, MARUNOUCHI, CHIYODA-KU, TOKYO 100-8310, JAPAN

To find out more about XD250U-ST and our projectors, visit us at

Global.MitsubishiElectric.com/projectors/